
Pro-XMPv2



MEDIUM / HIGH OUTPUT EXTRUSION WELDER

PRODUCTION WELDING OF GEOMEMBRANES AND RIGID THERMOPLASTICS



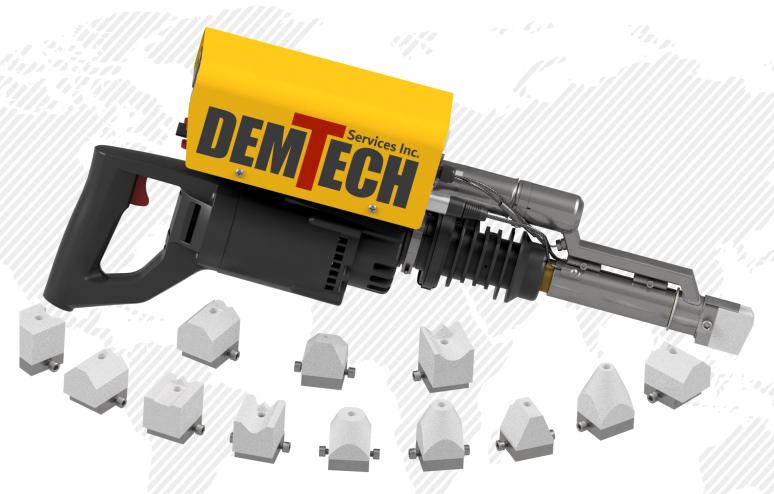

Long barrel reach for welding in tight places. Light weight for vertical and overhead applications.



Controls are easy to use and are protected from damage and accidental adjustment. Optional motor speed control to slow the welder for tight spots.




Bright LED headlights for better visibility in confined spaces and low light environments.

2 Welding Shoes included.Custom models available upon request.Call for details. Specifications on reverse



CONTACT US TODAY FOR INFORMATION





The PRO-XMPv2 Extrusion Welder, manufactured by DEMTECH Services, Inc., is the latest in a long line of high quality extrusion welders for detail and medium production welding of thermoplastic liners, pipe, and rigid sheet stock as well as many other plastic welding applications. Drawing from many years of experience in the plastic welding industry, we've designed features and functions into its design to satisfy the needs of the most demanding welding technicians.

- Powerful Demtech brand drive motor well known for reliability.
- Reliable, easy to set Watlow temperature controllers.
- Easy to use heater on/off controls.
- Bright LED "headlights" light-up work area in front of teflon welding shoe.
- Electronic "cold start" protection prevents starting of motor before minimum operating temperature is reached.
- Demtech's exclusive integral pre-heat air blower heating system. Not just a hot air welder mounted on top.
- Small diameter but long barrel/pre-heat design for easy welding access to tight spaces.
- Ergonomic handle adjusts easily with a "twist" to different positions for right handed or left handed operation.
- Handle doubles as a "kick stand," making it nearly impossible to tip welder over. No separate stand needed.
- Non-twisting rod feed design makes it easier to manage welding rod. Works with 4 or 5mm rod.
- Welding shoes are available in Demtech's pre-machined design or "blanks".
- Welding shoe rotates 360° to weld in any direction
- Lightweight... Reliable... Affordable...
- Includes a 2 piece aluminum stand powder coated Demtech yellow

2

ProXMPv2

Medium / High Output Extrusion Welder

TECHNICAL SPECIFICATIONS

Inventory ID
Weight (welder only)
Shipping Weight
Dimensions (welder only)
Welding Rod Size
Output w/4mm Rod
Output w/5mm Rod
Marcial Range
Welding Range
Operating Voltage
Power Consumption
Packaging

XM-83000 19.5 lbs. (8.85kilos) 53.5 lbs. (24.3kilos) 25 X 6 X 11" (63.5 X 15.2 X 28cm) 4 or 5 mm 4.5 lbs. (2 kilos) per hour 7 lbs. (3.2 kilos) per hour HDPE, LLDPE, PVDF, PE, PP, PVC 20 mil to 2" (.5 to 50 mm) thickness 230VAC, single phase 3000W, 13 Amps Sturdy molded case w/ foam insert

